

Grant 1 to 100rpm Vertical Multi-Function Rotator (PTR-60)


Product Code: GRNTPTR-60

Brand: Grant Instruments

The Grant 1 to 100rpm Vertical Multi-Function Rotator (PTR-60) is a compact and efficient variable-speed, variable-angle vertical rotator providing all the functionality - vertical rotation, reciprocation and vibration for thorough mixing of microtubes and reproducible sample preparation. All mixing functions can be linked or used separately.

Features

- 360° vertical rotation, reciprocation and vibration functions all in one compact product
- **Vertical rotation speed:** 1 to 100rpm
- **Reciprocal rotation:** 1 to 90° turning angle
- **Vibration:** programmable in a burst of 1 to 5 seconds
- Fully programmable sequence of functions, including pause
- Optional extra platforms to accommodate microplates and tubes up to 50ml
- Very easy to operate, with simple set-up of multi-segment programmes via push buttons and the 2-line LCD status display
- Reliable and extremely quiet motor produces regulated and reproducible rotation throughout the speed range
- Compact with a low profile and small footprint - fits neatly into the workspace
- Low voltage cord easily fits through door gaskets, allowing use in incubators, refrigerators and workstations. Safe and economical running
- All actions - rotation, reciprocation and vibration - can be set for continuous or timed operation, or linked together in different combinations to ensure optimum mixing conditions for your application
- Supplied with platform accommodating up to 26 (PTR-35) and 48 (PTR-60) microtubes. Maximum rotating speed of up to 100rpm

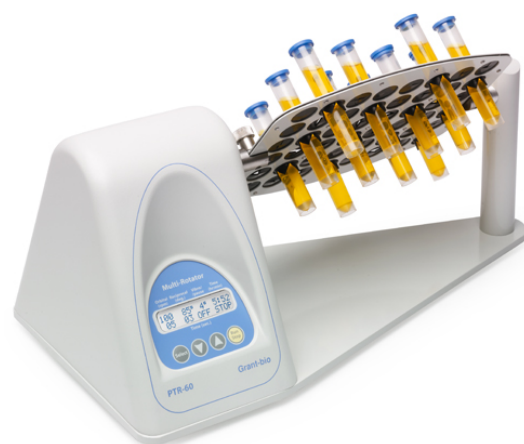

Applications

Life science laboratories - for hybridisation reactions, cell growth, soft extraction and homogenisation of biological components in solutions, as well as for reactions of binding and washing of magnetic particles, cell suspensions, incubations, extraction procedures, gel ashing and mixing capillary blood samples

Specifications

Speed (rpm)	1 to 100 (increment 1pm)
Tilt Angle (reciprocal mode)	1 to 90°
Tilt Angle (vibration mode)	1 to 5°
Timer, with automatic switch-off	1 min. to 24 hr.
Timer Setting Range	1 to 250
Timer, vibration mode	1 to 5 Pause: 1 to 5
Maximum Load (kg)	0.8
Display	2 x 16 character LCD
Operating Temperature Range (°C)	4 to 40
External Power Supply	Input AC 120 - 230V, 50/60Hz Output DC 12V
Input Voltage (V DC)	24
Power Consumption (W)	18 (0.75A)

Unit 3, Tower Business Park
Warpsgrove Lane
Chalgrove
Oxfordshire
OX44 7XZ

Tel: (+44) 01865 400321

Email: enquiries@medlinescientific.com

Website: www.medlinescientific.com